DOCUMENT RESUME

ED 069 147 EM 010 449

AUTHOR	Stagl, Thomas W.; Singh, Jai P.
TITLE	A Computer Program for Mapping Satellite-borne Narrow-Beam Antenna Footprints on Earth. Memorandum Number 72/3.
INSTITUTION	Washington Univ., St. Louis, Mo. Program on Application of Communication Satellites to Educational Development.
SPONS AGENCY	National Aeronautics and Space Administration, Washington, D.C.
PUB DATE	Mar 72
NOTE	29p.
EDRS PRICE	MF-$0.65 HC-$3.29
DESCRIPTORS	*Communication Satellites; *Community Antennas; *Computer Programs

ABSTRACT

Written primarily to define the area of the earth covered by a narrow-beam antenna carried on a synchronous satellite in circular, near equatorial orbits, a computer program has been developed that computes the locus of intersection of a quadric cone and a sphere. The program, which outputs a list of the longitude and latitude coordinates of the locus of intersection and a plot of the locus, is presented and described in several sections in this paper: first, a mathematical analysis of the problem is offered; next, a section on usage describes inputs and outputs; and finally, some typical examples are presented. A program listing is appended. See also EM 010 450. (Author/SH)

ED 069147



WASHINGTON UNIVERSITY

Memorandum. No. 72/3

March, 1972

A COMPUTER PROGRAM FOR MAPPING SATELLITE-BORNE NARROW-BEAM ANTENNA FOOTPRINTS ON EARTH

Thomas W. Stagl
Jai P. Singh

FILMED FROM BEST AVAILABLE COPY

ED 069147

PROGRAM ON APPLICATION OF COMMUNICATIONS SATELLITES
TO EDUCATIONAL DEVELOPMENT

WASHINGTON UNIVERSITY

Memorandum No. 72/3

March, 1972

U.S. DEPARTMENT OF HEALTH,
EDUCATION & WELFARE
OFFICE OF EDUCATION
THIS DOCUMENT HAS BEEN REPRODUCED EXACTLY AS RECEIVED FROM THE PERSON OR ORGANIZATION ORIGINATING IT. POINTS OF VIEW OR OPINIONS STATED DO NOT NECESSARILY REPRESENT OFFICIAL OFFICE OF EDUCATION POSITION OR POLICY

A COMPUTER PROGRAM FOR MAPPING SATELLITE-BORNE NARROW-BEAM ANTENNA FOOTPRINTS ON EARTH

Thomas W. Stagl
Jai P. Singh

This research is supported by the National Aeronautics and Space Administration under Grant No. Y/NGL-26-008-054. This memorandum is primarily for internal distribution and does not necessarily represent the views of either the research team as a whole or the National Aeronautics and Space Administration.

Table of Contents

		Page
I.	Introduction	1
II.	Mathematical Analysis	2
III.	Usage	10
IV.	Typical Examples	12
V.	References	21
	Appendix A	
	Program Listing	22

A COMPUTER PROGRAM FOR MAPPING SATELLITE-BORNE NARROW-BEAM ANTENNA FOOTPRINTS ON EARTH

I. INTRODUCTION

A computer program has been developed that computes the locus of intersection of a quadric cone and a sphere. The outputs of the program are a list of the longitude and latitude coordinates of the locus of intersection and a plot of the locus. It was written primarily to define the area of the earth covered by a narrow-beam antenna carried on a synchronous satellite in circular, near equatorial orbits.

The program is basically an implementation of a report by S. L. Zolnay[1] with some modifications added. The main modifications are the incorporation of an elliptical cross section antenna beam and computation of the beam vertex angles and corresponding locus of intersection for any signal level between 0.1 and 10 db down from the beam center. Any number of signals up to 10 may be input for each data set. The output will be plotted on the same graph.

The program was written for use with a Cal Comp 570/563 off-line plotting system and uses the standard Cal Comp subroutines supplied with the system. The plot is drawn using linear longitude and latitude scales and non-linear scales such as Mercator scales cannot be used.

It should be noted that this program assumes the earth to be spherical rather than oblate as it actually is. However, by assuming a spherical earth, one introduces maximum error distances of about 11.5 nautical miles. For many purposes, this error can be ignored.

II. MATHEMATICAL ANALYSIS

Figure 1 shows the intersection geometry. The satellite is located at point SAT in a circular, near-equatorial orbit which is a distance DIST from center of the earth. Point P is the point of intersection of satellite antenna boresight (or beam center) and the earth. AL is the arc from the point on earth directly below the satellite (the subsatellite point) to P and is given by:

$$AL = \text{Cos}^{-1} [\text{Cos}(\text{LONCTR})\text{Cos}(\text{LACTR} + \text{DELT})] \qquad (1)$$

Where LATCTR is latitude of P, LONCTR is the longitude of P relative to the subsatellite point, and DELT is the instantaneous declination angle formed by a vector from satellite to the center of the earth and the equatorial plane. At DIST = 30,220 statute miles (geostationary equatorial orbit when DELT = 0), the maximum arc, AL, permissible for the point to be seen by the satellite is 81.3°. When AL is computed to be larger than 81.3°, the point is over the horizon seen by the satellite and any attempt at finding the locus of intersection would produce meaningless results. Therefore, the computation stops at this point.

The next step is to calculate the vector, $\underline{RS}$, extending from the satellite to point P. A right-handed coordinate system is constructed with the origin at SAT, the positive Y axis extending through the earth center and the Z axis in the plane defined by SAT and the north and south poles. The vector $\underline{RS}$ is given in terms of coordinates along these axes:

$$\begin{aligned} \underline{RS} = {} & \text{RE cos(LATCTR) sin(LONCTR) } \underline{i} + \\ & [\text{DIST cos(DELT) - RE cos(LATCTR) cos(LONCTR)}] \underline{j} + \\ & [\text{DIST sin(DELT) + RE sin(LATCTR)}] \underline{k} \end{aligned} \qquad (2)$$

Where RE is radius of earth, and $\underline{i}$, $\underline{j}$ and $\underline{k}$ are unit vectors in the positive x, y, and z directions, respectively.

Pitch and roll angles are then defined as in Figure 2. These are given by:

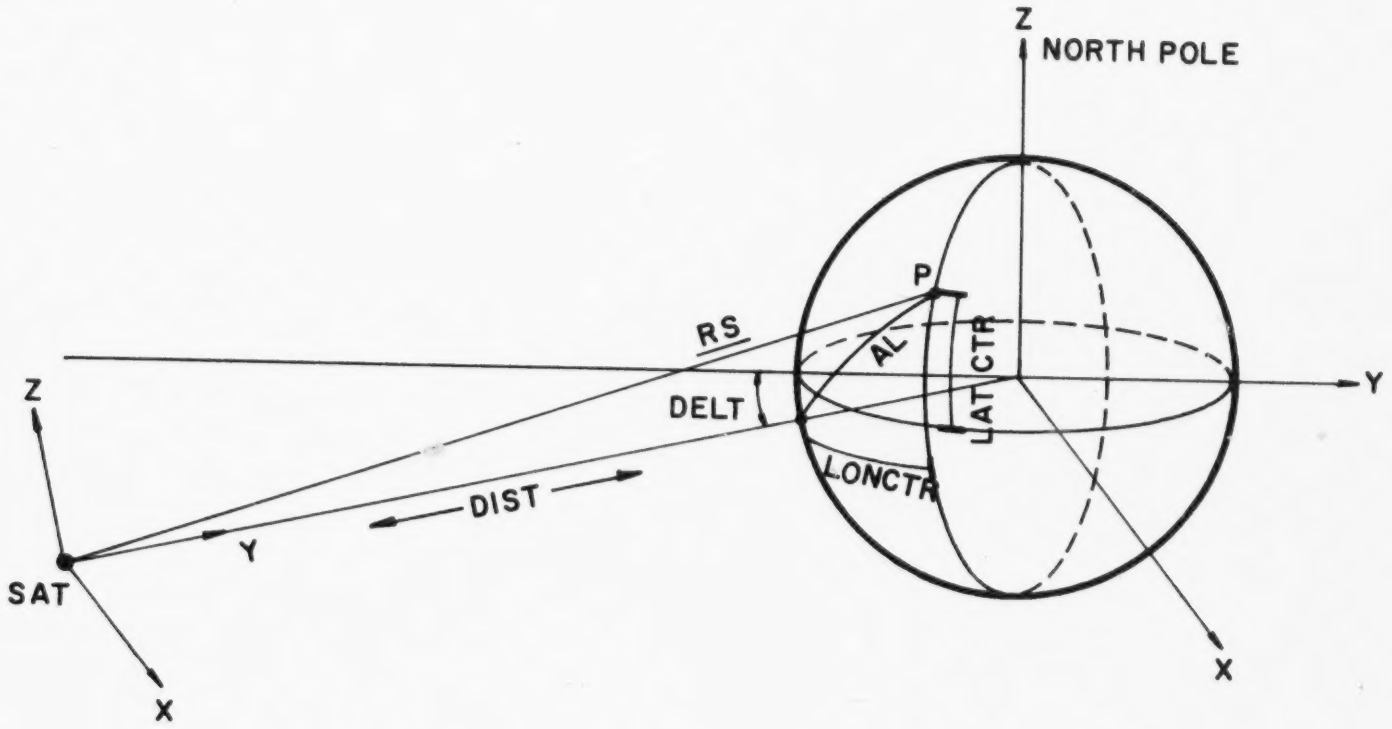

FIGURE 1 GEOMETRY OF INTERSECTION

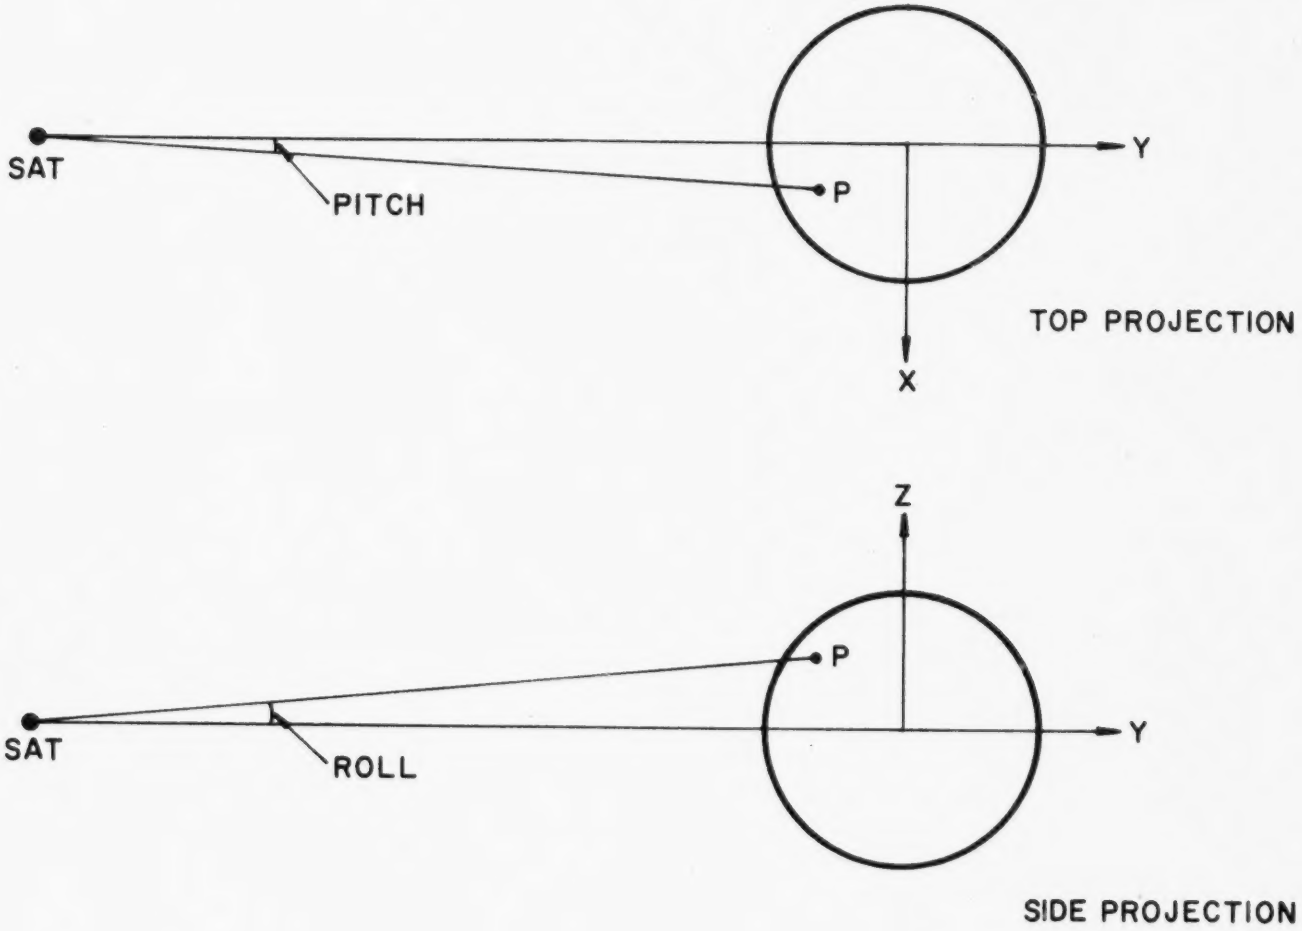

FIGURE 2 GRAPHIC DESCRIPTION OF PITCH AND ROLL ANGLES

$$\text{PITCH} = \text{Sin}^{-1} \frac{RS_{\underline{i}}}{\sqrt{RS_{\underline{i}}^2 + RS_{\underline{j}}^2}} \tag{3}$$

$$\text{ROLL} = \text{Tan}^{-1} \frac{RS_{\underline{k}}}{\sqrt{RS_{\underline{i}}^2 + RS_{\underline{j}}^2}} \tag{4}$$

A new coordinate system is defined by rotating the old system about its z-axis by an angle equal to PITCH, and then about the resultant x-axis by an angle equal to ROLL.

A vector $\underline{U}$ is then defined as lying in a plane perpendicular to vector $\underline{RS}$. The origin of vector $\underline{U}$ is at the point of intersection of $\underline{RS}$ and that plane, see Figure 3.

The equation defining $\underline{U}$ is:

$$\underline{U} = [\cos(\text{BETA})\ \underline{i}' + \sin(\text{BETA})\ \underline{k}'] [A^{-2}\cos^2(\text{BETA}) + B^{-2}\sin^2(\text{BETA})]^{-\frac{1}{2}} \tag{5}$$

where $\underline{i}'$ and $\underline{k}'$ are unit vectors in the new coordinate system. This equation is a parametric equation of an ellipse with BETA as the parameter and A and B corresponding to the semi-major and semi-minor axes, respectively.

A ray on the surface of the beam can now be generated by a vectorial addition of $\underline{RS}$ and $\underline{U}$. By incrementing BETA from 0° to 360° the entire outer surface of the beam can be generated.

Let a vector $\underline{Mn}$ be a surface generator vector. The equation defining $\underline{Mn}$ in the new coordinate system is:

$$\begin{aligned}\underline{Mn} = {} & [|\underline{RS}| \cos(\text{ROLL}) \sin(\text{PITCH}) + |\underline{U}| \cos(\text{BETA}) \cos(\text{PITCH}) \\ & - |\underline{U}| \sin(\text{BETA}) \sin(\text{ROLL}) \sin(\text{PITCH})]\ \underline{i}' \\ & + [|\underline{RS}| \cos(\text{ROLL}) \cos(\text{PITCH}) + |\underline{U}| \cos(\text{BETA}) \sin(\text{PITCH}) \\ & - |\underline{U}| \sin(\text{BETA}) \sin(\text{ROLL}) \cos(\text{PITCH})]\ \underline{j}' \\ & + [|\underline{RS}| \sin(\text{ROLL}) + |\underline{U}| \sin(\text{BETA}) \cos(\text{ROLL})]\ \underline{k}' \end{aligned} \tag{6}$$

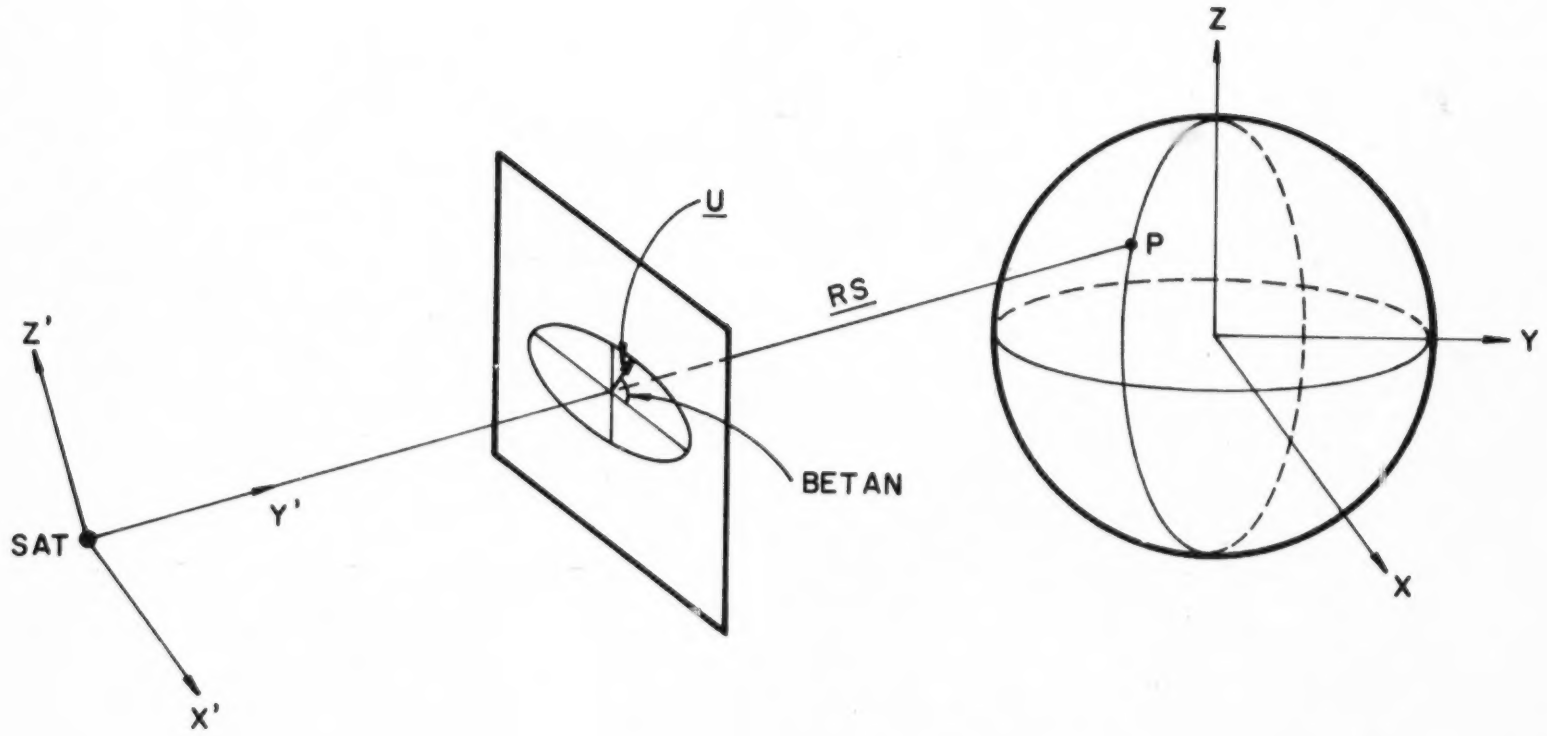

FIGURE 3 GRAGHIC DESCRIPTION OF BEAM CROSS SECTION

In the old coordinate system:

$$\underline{Mn} = [Mn_{\underline{i}'}]\ \underline{i} + [Mn_{\underline{j}'}\cos(DELT) + Mn_{\underline{k}'}\sin(DELT)]\ \underline{j} + [-Mn_{\underline{j}'}\sin(DELT) + Mn_{\underline{k}'}\cos(DELT)]\ \underline{k} \quad (7)$$

Pitch and roll angles are defined for each $\underline{Mn}$ as follows:

$$PITCH\ N = Sin^{-1}\frac{Mn_{\underline{i}'}}{\sqrt{Mn_{\underline{i}'}^2 + Mn_{\underline{j}'}^2}} \quad (8)$$

$$ROLL\ N = Tan^{-1}\frac{Mn_{\underline{k}'}}{\sqrt{Mn_{\underline{i}'} + Mn_{\underline{j}'}}} \quad (9)$$

The earth radius vector to the point of intersection of $\underline{Mn}$ is:

$$\underline{RE} = [Mn\cos(ROLLN)\sin(PITCHN)]\ \underline{I} + [DIST\cos(DELT) - Mn\cos(ROLLN)\cos(PITCHN)]\ \underline{J} + [Mn\sin(ROLLN) - DIST\sin(DELT)]\ \underline{K} \quad (10)$$

Where Mn in the length of $\underline{Mn}$ and $\underline{I}$, $\underline{J}$, and $\underline{K}$ are unit vectors in an earth centered coordinate system whose positive z axis extends through the north pole and positive x axis intersects the 0° meridian.

The latitude and relative longitude coordinates of the point of intersection of $\underline{Mn}$ are found by:

$$LAT = Tan^{-1}\frac{RE_{\underline{K}}}{\sqrt{RE_{\underline{I}}^2 + RE_{\underline{J}}^2}} \quad (11)$$

$$LON = Sin^{-1}\frac{RE_{\underline{I}}}{\sqrt{RE_{\underline{I}}^2 + RE_{\underline{J}}^2}} \quad (12)$$

The actual longitude is found by adding the above longitude to the longitude of the subsatellite point.

The relative beamwidth for any signal level is found using a beamwidth conversion chart. The particular chart used in this program is taken from Microwave Engineers Handbook[2], (see Figure 4). The actual conversion in the program is done by using linear interpolation between the appropriate two consecutive points from the following set:

(.1, .18) (.2, .26) (.5, .4) (1., .56) (1.5, .7) (3., 1.) (5., 1.27) (10., 1.7)

These points were chosen such that the graph segment between any two consecutive points is approximately linear.

The above discussion assumes that the entire antenna beam intersects the earth. The case when the boresight location is near enough to the horizon that a portion of the beam passes the earth is considered next.

Define an angle, Bn formed by the vector $\underline{Mn}$ and the vector from the satellite to earth center. The angle at which $\underline{Mn}$ is tangent to the earth is given, from the law of sines, as:

$$B_{max} = \mathrm{Sin}^{-1} \frac{RE}{DIST} \tag{13}$$

When the angle B_n is larger than B_{max} the earth radius vector $\underline{RE}$ must be computed to the point of tangency, i.e. the horizon seen by the satellite. The vector $\underline{RE}$ is then defined by:

$$\begin{aligned} \underline{RE} = {} & RE\,[\cos(B_{max})\,\sin(TAUN)]\,\underline{I} \\ & - RE\,[\cos(DELT)\,\sin(B_{max}) \\ & + \sin(DELT)\,\cos(B_{max})\,\cos(TAUN)]\,\underline{J} \\ & - RE\,[\sin(DELT)\,\sin(B_{max}) \\ & - \cos(DELT)\,\cos(B_{max})\,\cos(TAUN)]\,\underline{K} \end{aligned} \tag{14}$$

When TAUN is the tilt angle defined by:

$$TAUN = \mathrm{Cos}^{-1} \frac{Mn_{\underline{k}}}{\sqrt{Mn_{\underline{i}}^2 + Mn_{\underline{k}}^2}} \tag{15}$$

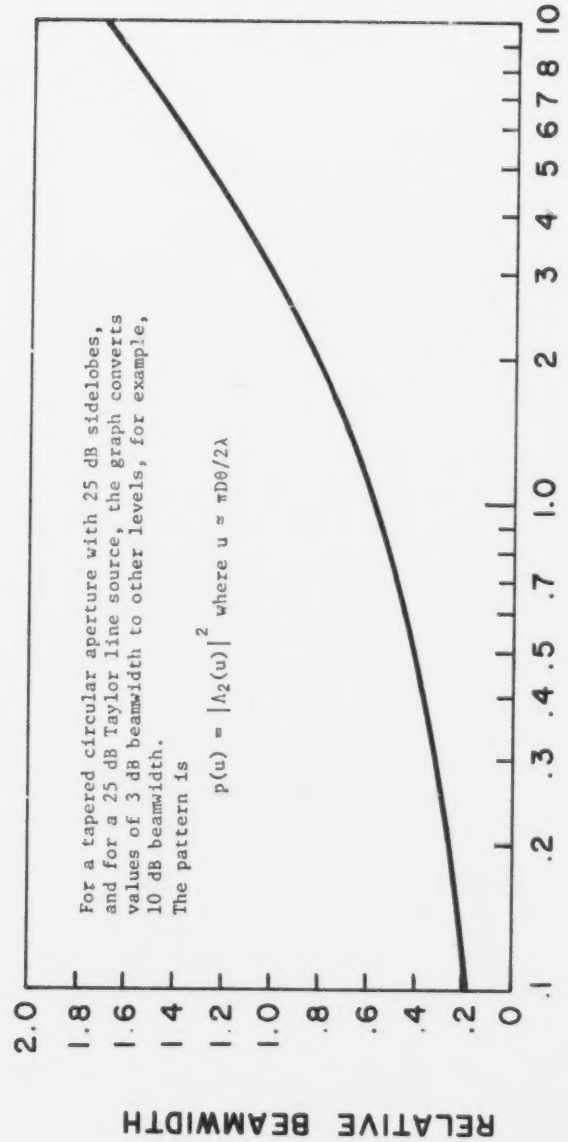

FIGURE 4 BEAMWIDTH CONVERSION

and RE is the radius of the earth. The latitude and relative longitude coordinate are found as in equations (11) and (12).

III. USAGE

The inputs to the program are:

LONSS - longitude of point on earth directly below satellite (°E)
LONCT - longitude of boresight intersection (°E)
LATCT - latitude of boresight intersection (°N)
INCR - increments of angular parameter BETA, i.e. number of points plotted = 360°/INCR
DELT - instantaneous declination of satellite - earth center vector from plane of equator (°below equatorial plane)
THETA - orientation angle of elliptical beam about beam center (measured positive counter-clockwise)
BW1 - beam vertex angle in plane defined by beam vertex and major axis of beam cross section at point 3 db below beam center
BW2 - beam vertex angle in plane defined by beam vertex and minor axis of beam cross section at point 3 db below beam center
L - number of signal levels to be plotted
DB(I) - signal levels to be plotted (measured in db below beam center)

It should be noted that all inputs except L and DB(I) are in degrees rather than radians. Longitude inputs can be expressed as degrees east of 0° or negative degrees west of 0°. The output will agree with the input.

Each input data set will consist of three cards. The format for the data is:

Card #1

column	
1 - 9	LONSS
10 - 18	LONCT
19 - 27	LATCT
28 - 36	INCR
37 - 45	DELT

Card #2

1 - 9	THETA
10 - 18	BW1
19 - 27	BW2
28 - 29	L

Card #3

1 - 7	
8 - 14	DB(I)
15 - 21	

Every input, with the exception of L, must contain a decimal point. The input L must not contain a decimal point and must be right justified in columns 28-29, i.e. single digit input must be in column 29. The inputs DB(I) must be input in increasing order with the signal level closest to beam center listed first and the level farthest from beam center listed last.

The output of the program consists of two parts, the printout and the plot. The printout contains, for each set of input data, a list of the following parameters:

SUB SAT LONG - longitude of point directly below satellite
BOR SGHT LONG - longitude of boresight intersection
BOR SGHT LAT - latitude of boresight intersection
DECLINATION - instantaneous declination of satellite-earth center vector from equatorial plane
MIN BMWDTH - beamwidth along minor axis of beam cross section at -3 db (half-power) level
MAX BMWDTH - beamwidth along major axis of beam cross section at -3 db (half-power) level
ORIENTATION - orientation angle of beam about beam center
ELEVATION - angle formed by vector RS and a plane tangent to earth at boresight intersection

The remainder of the printout gives the maximum and minimum beamwidth and a listing of the coordinates of the locus of intersection for each signal level.

Each set of input data is given a data set number. This number appears on the printout and the plot for each data set. This facilitates matching of plots with printout when more than one data set is run.

A modification of this program has recently been developed to plot the coverage of a multi-beam satellite. This new program computes the locus of intersection of a number of sets of input data as does the original. However, the modification plots all of the intersection loci on one set of axes so that uncovered areas and overlapped areas are immediately obvious.

The major changes to the original program are:

1. The plotter tape is opened and the axes are drawn before the main calculation begins.
2. The axes are scaled once at the beginning of the program rather than being scaled for each data set.
3. The computed coordinates are checked to see that they do not extend beyond the limits of the axes.
4. The plot origin is not reset for each data set.

IV. TYPICAL EXAMPLES

Figures 5-9 present the area coverage plots for input values shown in Table 1. For each case, 3, 5 and 10 dB level contours are plotted. The inputs represent a wide variety of cases--satellites positioned in circular, equatorial and geosynchronous orbits; satellites positioned in slightly inclined stationary orbits; and area coverage at small inclination angles.

Figure 10 shows the coverage provided by a 4-beam satellite positioned at 120°W longitude. All plots use the same set of axes. The input values for various beams are given in Table 2. All four beams are designed to provide complete coverage to the United States--beam 1 covers Hawaii, beam 2 covers Alaska, and beams 3 and 4 provide coverage to the other 48 states.

Table 1. Input Values for Coverage Plots shown in Figures 5-9

Input	Case I (Figure 5)	Case II (Figure 6)	Case III (Figure 7)	Case IV (Figure 8)	Case V (Figure 9)
Subsatellite Longitude	-115.00	-115.00	-115.00	-115.00	-115.00
Boresight Longitude	-157.00	-157.00	- 74.00	- 74.00	- 74.00
Boresight Latitude	21.30	21.30	40.75	40.75	40.75
Declination (in degrees)	0.00	0.00	0.00	1.00	0.00
Minor-axis Beamwidth (in degrees)	1.50	0.75	1.00	1.00	1.00
Major-axis Beamwidth (in degrees)	1.50	1.50	1.00	1.00	0.50
Orientation (in degrees)	0.00	- 25.00	0.00	0.00	40.00

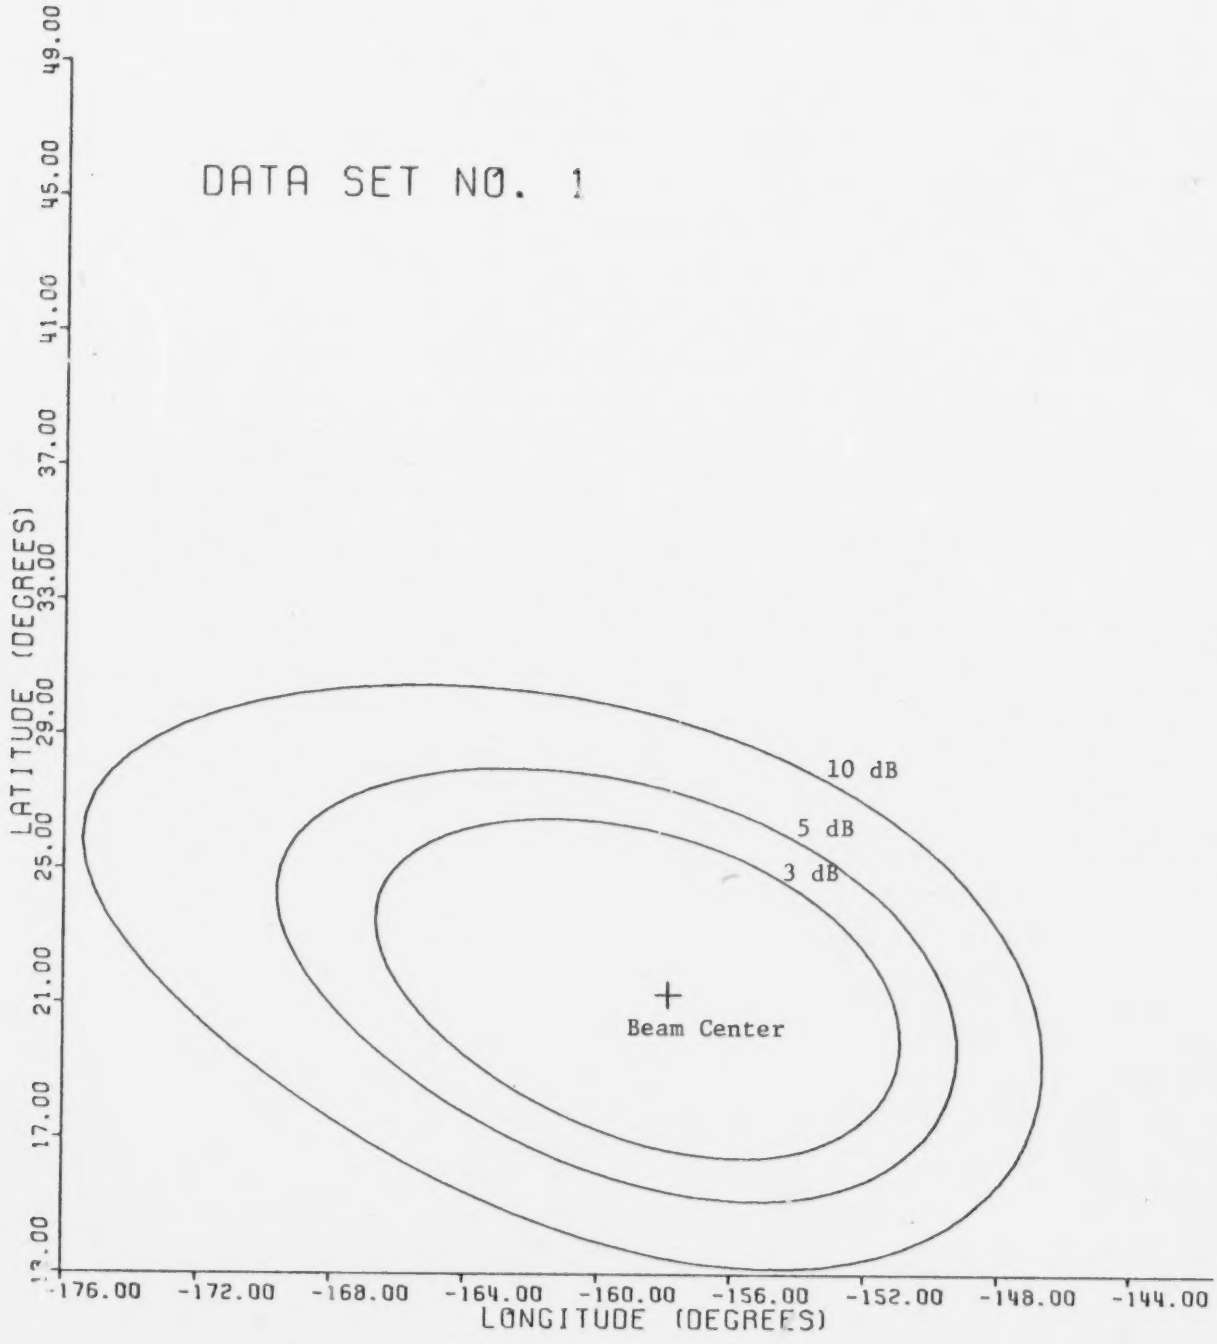
DATA SET NO. 1
LATITUDE (DEGREES)
49.00
45.00
41.00
37.00
33.00
29.00
25.00
21.00
17.00
13.00
10 dB
5 dB
3 dB
Beam Center
-176.00
-172.00
-168.00
-164.00
-160.00
-156.00
-152.00
-148.00
-144.00
LONGITUDE (DEGREES)

Figure 5

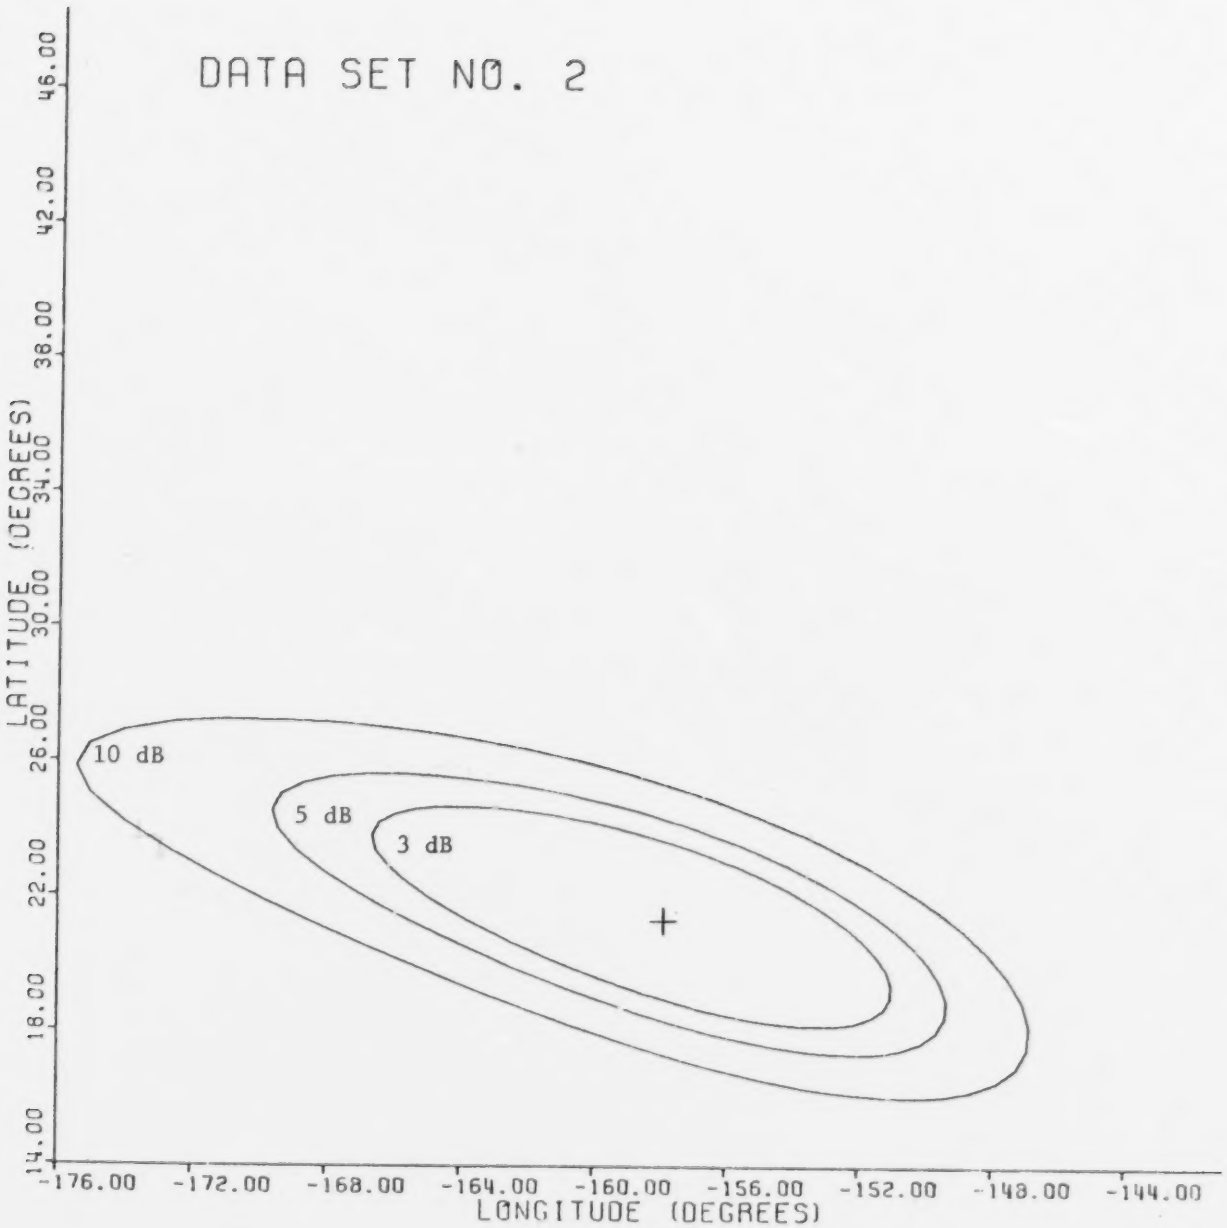
DATA SET NO. 2
LATITUDE (DEGREES)
46.00
42.00
38.00
34.00
30.00
26.00
22.00
18.00
14.00
10 dB
5 dB
3 dB
-176.00
-172.00
-168.00
-164.00
-160.00
-156.00
-152.00
-148.00
-144.00
LONGITUDE (DEGREES)

Figure 6

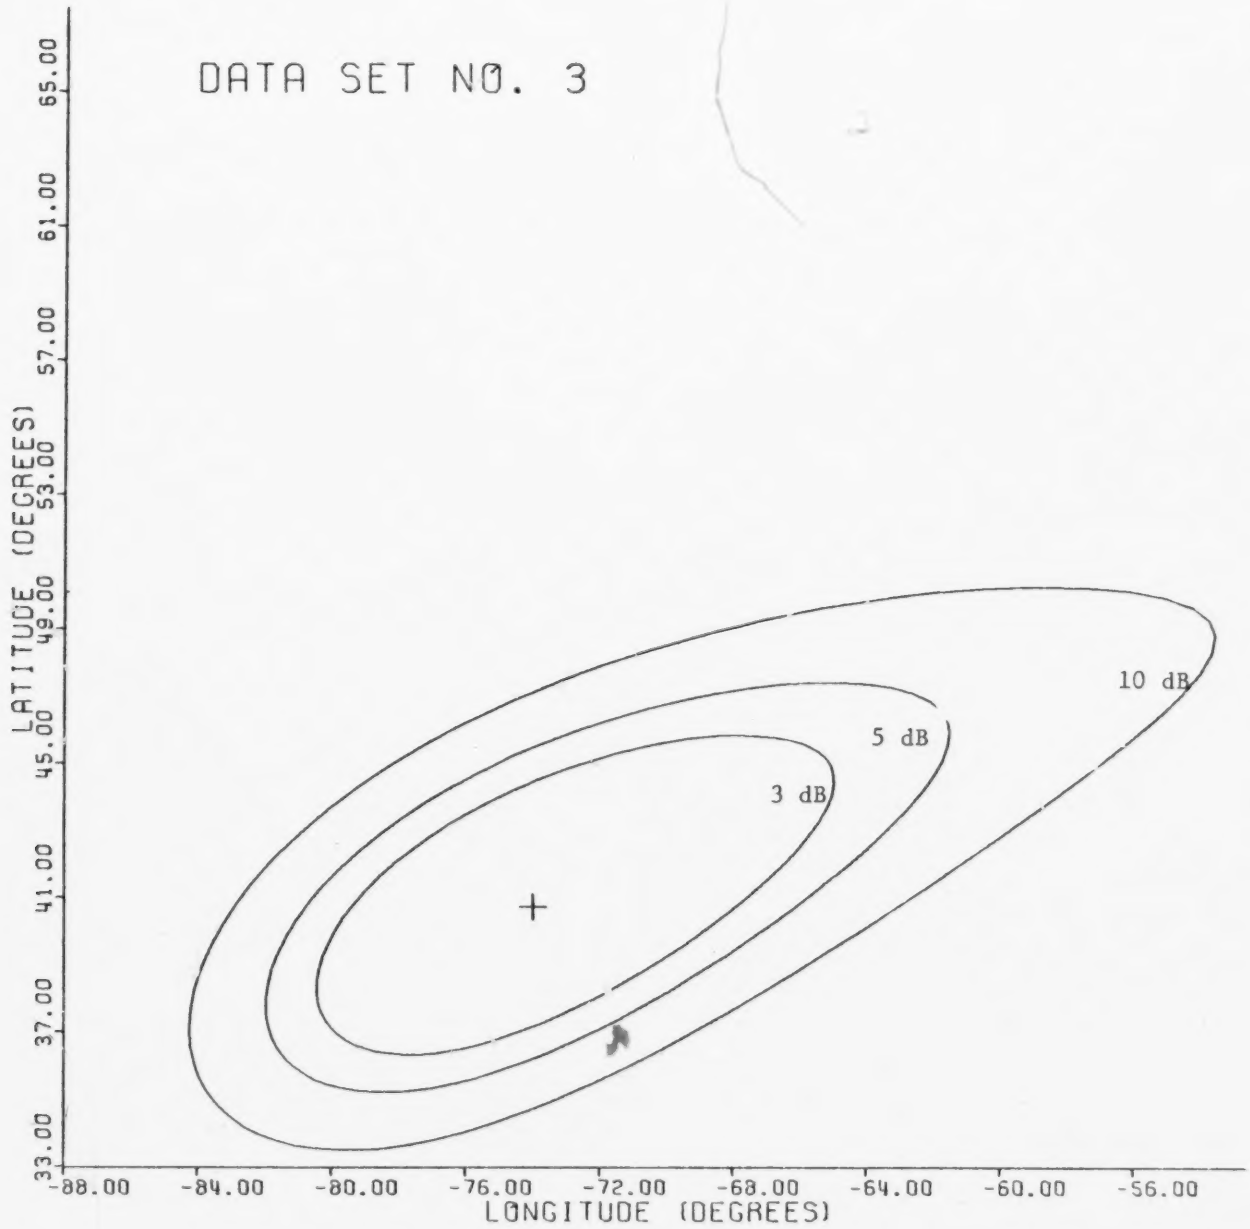
DATA SET NO. 3
LATITUDE (DEGREES)
65.00
61.00
57.00
53.00
49.00
45.00
41.00
37.00
33.00
10 dB
5 dB
3 dB
-88.00
-84.00
-80.00
-76.00
-72.00
-68.00
-64.00
-60.00
-56.00
LONGITUDE (DEGREES)

Figure 7

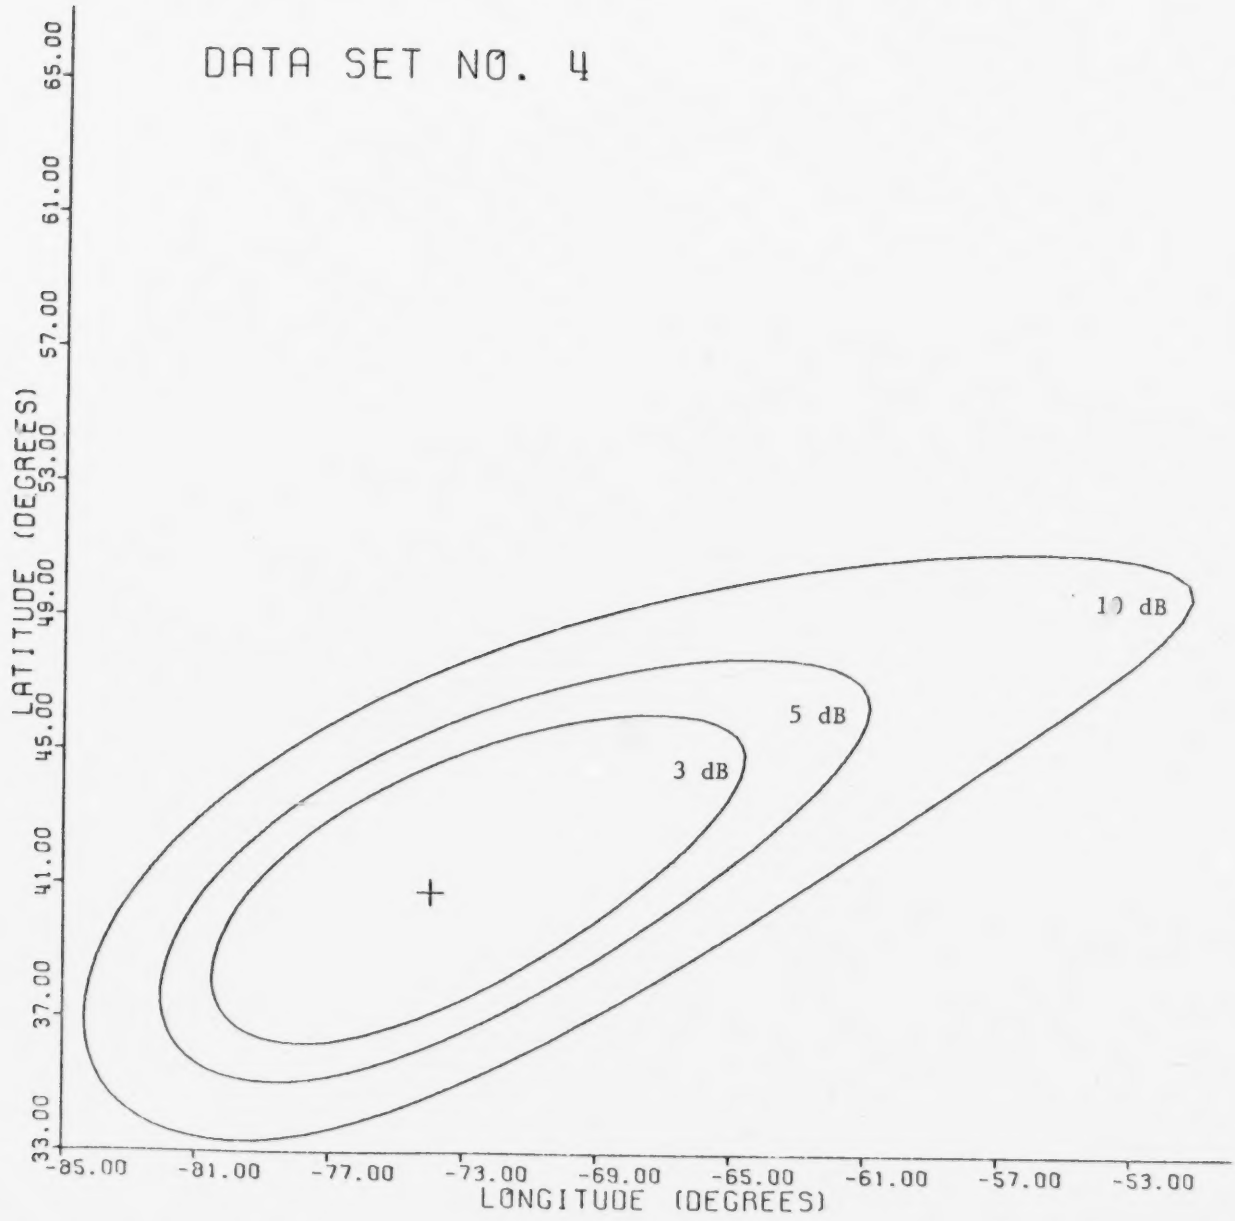
DATA SET NO. 4
LATITUDE (DEGREES)
65.00
61.00
57.00
53.00
49.00
45.00
41.00
37.00
33.00
10 dB
5 dB
3 dB
-85.00
-81.00
-77.00
-73.00
-69.00
-65.00
-61.00
-57.00
-53.00
LONGITUDE (DEGREES)

Figure 8

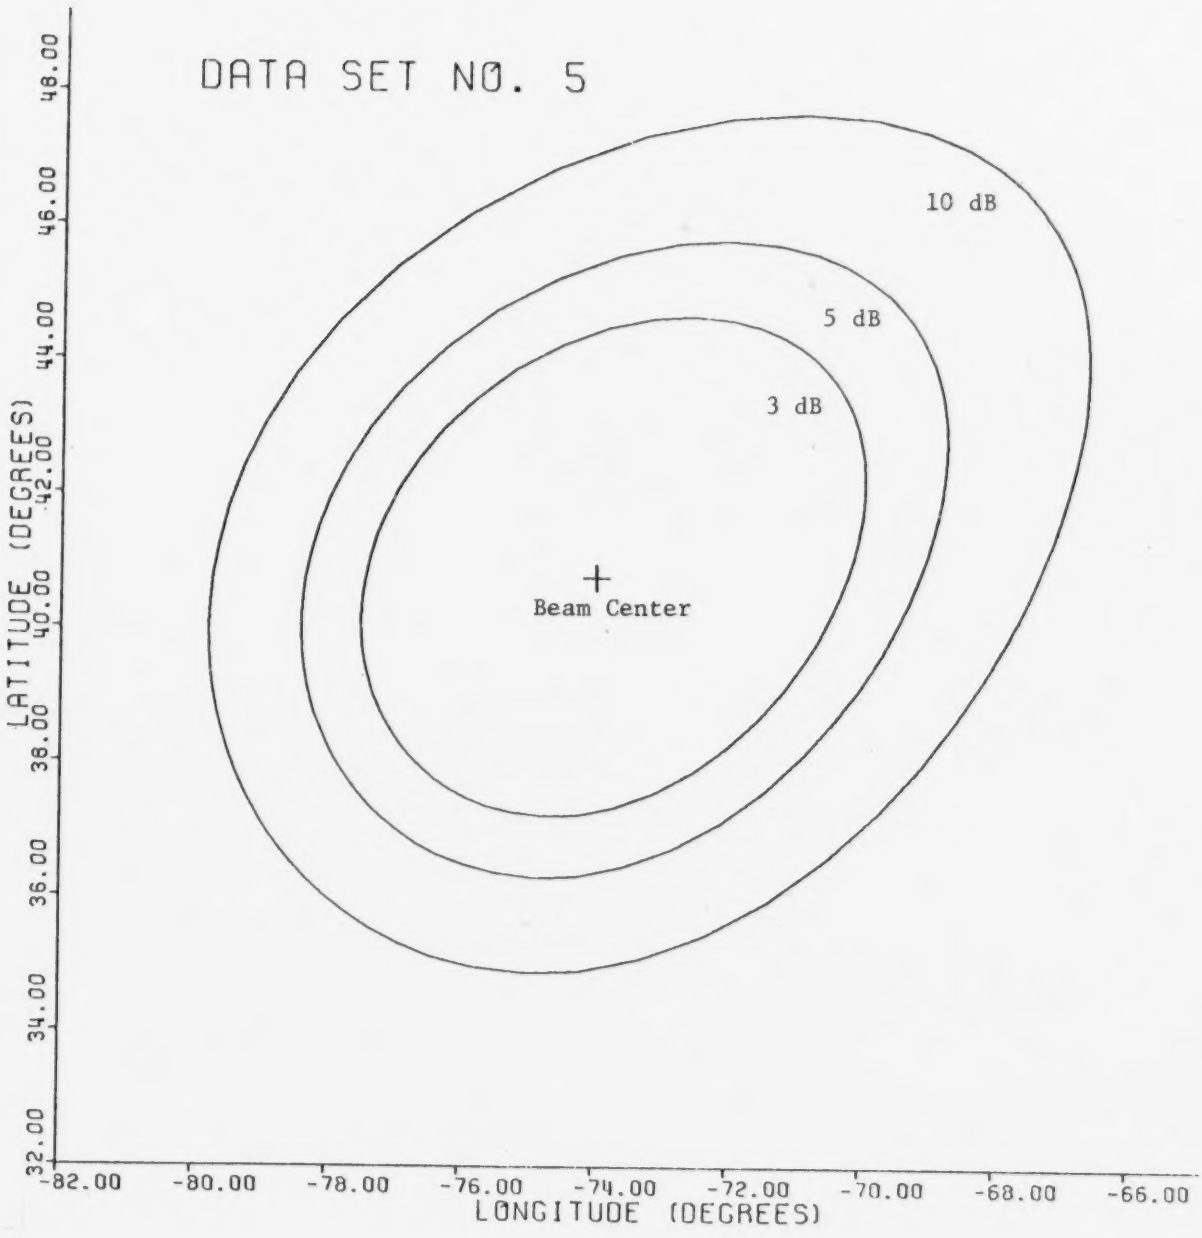
DATA SET NO. 5
10 dB
5 dB
3 dB
Beam Center
LATITUDE (DEGREES)
32.00
34.00
36.00
38.00
40.00
42.00
44.00
46.00
48.00
-82.00
-80.00
-78.00
-76.00
-74.00
-72.00
-70.00
-68.00
-66.00
LONGITUDE (DEGREES)

Figure 9

Table 2. Input Values for 4-Beam Coverage Plot Shown in Figure 10

Input	Hawaii	Alaska	Beam I for western and mountain states	Beam II for eastern and central states
Subsatellite Longitude	-120.00	-120.00	-120.00	-120.00
Boresight Longitude	-158.00	-145.00	-112.00	- 88.00
Boresight Latitude	21.00	63.00	37.00	36.00
Satellite Declination (in degrees)	0.00	0.00	0.00	0.00
Minor-axis Beamwidth (in degrees)	1.50	1.50	3.30	3.30
Major-axis Beamwidth (in degrees)	2.00	2.30	3.40	3.70
Orientation (in degrees)	135.00	110.00	0.00	0.00

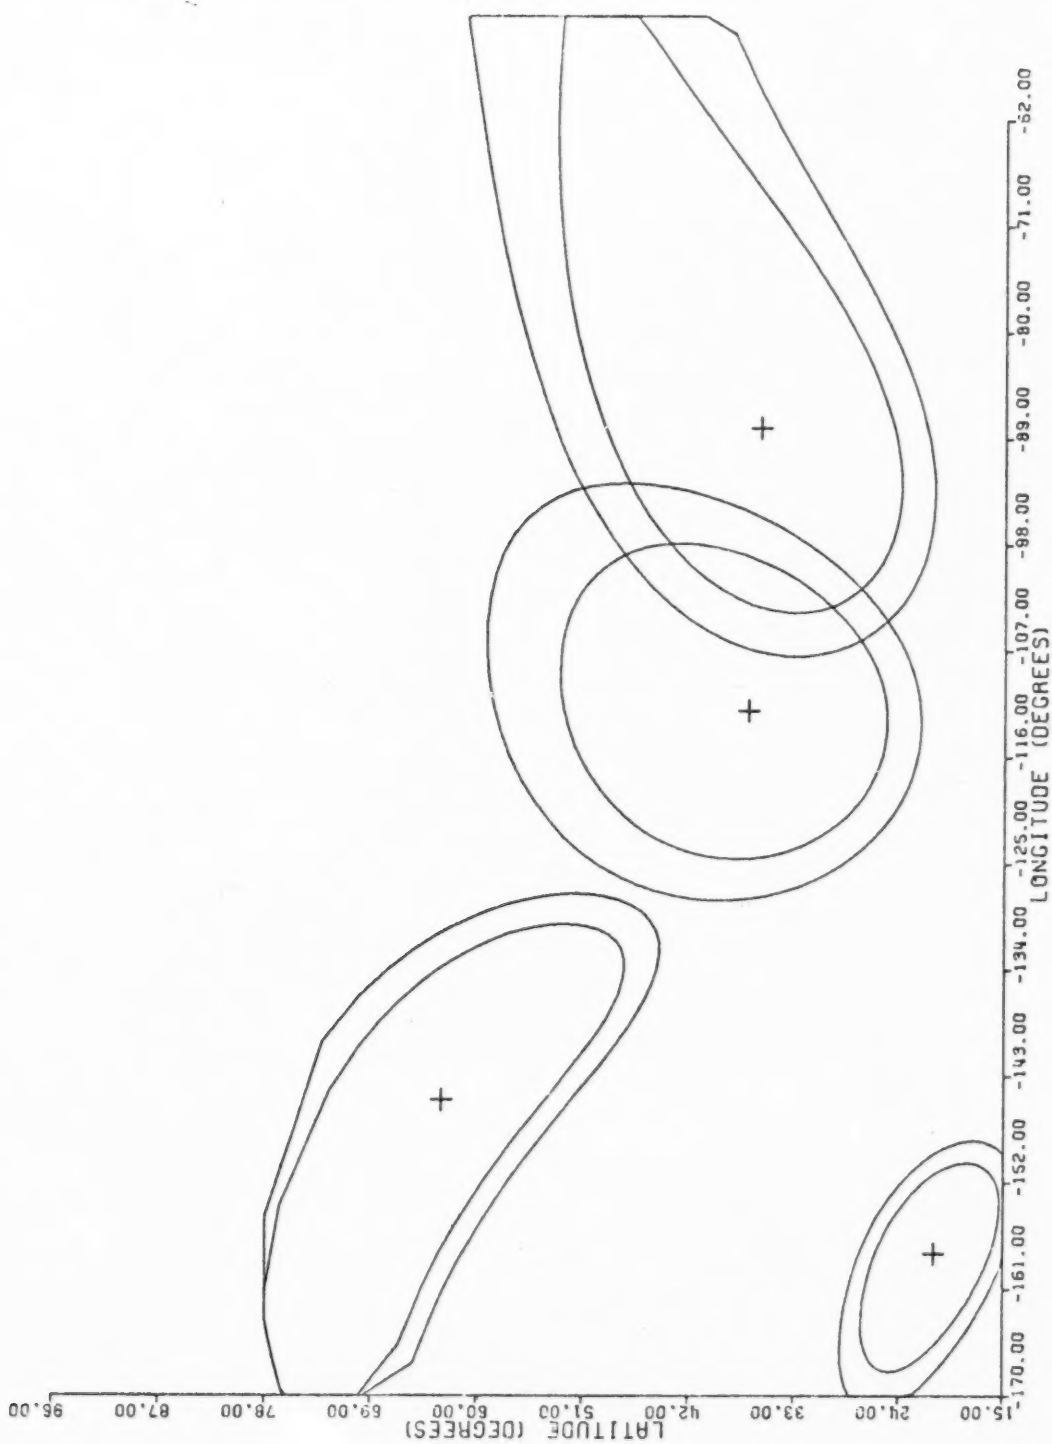

Figure 10. Four Beam Coverage of U.S. (see Table 2)

V. REFERENCES

1. S. L. Zolnay, "Earth Coverage ('Footprint') of a Satellite-Borne Antenna", Technical Note 1971-7, Lincoln Laboratory, Massachusetts Institute of Technology, Lexington, Massachusetts (February 5, 1971).

2. Theodore S. Saad, "Antennas" in Microwave Engineers Handbook (Vol. 2), Dedmam, Massachusetts: Artech House, Inc., p. 24.

3. W. Solfrey, "Earth Coverage Patterns with High Gain Antenna on Stationary Satellites", Memorandum RM-4894-NASA, The Rand Corporation, Santa Monica, California (1967).

APPENDIX A

PROGRAM LISTING

```
0001              IMPLICIT REAL*8(A-Z)
0002              REAL*8 DSIN,DCOS,DSQRT,DARSIN,DARCOS,DATAN
0003              INTEGER*4 NSTEPS,ICT,I,N,NPLT,IBUF(1000),NP1,NP2,NDB,LDB
0004              INTEGER*4 J,J1,L,K
0005              INTEGER*4 FMT(4)/'(',4H    ,'F7.3',')'/
0006              INTEGER*4 DIGIT(10)/'1','2','3','4','5','6','7','8','9','10'/
0007              REAL*4 LON(722),LAT(722),N1,XCT,YCT
0008              DIMENSION DB(10),DBS(8),RBWS(8)
0009              DATA DBS/.1,.2,.5,1.,1.5,3.,5.,10./
0010              DATA RBWS/.18,.26,.4,.56,.7,1.,1.27,1.7/
0011              DATA PI/3.14159265358979300/,RE/3.9603/,DIST/2.62604/
0012              N=0
0013              NPLT=0
0014              CONVTR=PI/180.
0015              BM=DARSIN(RE/DIST)
0016              CHK=81.3*CONVTR
0017            1 READ(5,500,END=1000)DLONSS,DLONCT,DLATCT,DINCR,DDELT
0018          500 FORMAT(5F9.3)
0019              READ(5,501)THETA1,BW1A,BW2A,L
0020          501 FORMAT(3F9.3,I2)
0021              FMT(2)=DIGIT(L)
0022              READ(5,FMT)(DB(I),I=1,L)
0023              NDB=0
0024              N=N+1
0025              WRITE(6,600)N,DLONSS,DLONCT,DLATCT,DDELT,BW2A,BW1A,THETA1
0026          600 FORMAT(///'1DATA SET NO. ',I2/4X,'SUB SAT LONG   =',F9.3/
                 1  4X,'BOR SGHT LONG  =',F9.3/4X,'BOR SGHT LAT   =',F9.3/
                 2  4X,'DECLINATION    =',F9.3/4X,'MIN BMWDTH',5X,'=',F9.3/
                 3  4X,'MAX BMWDTH',5X,'=',F9.3/4X,'ORIENTATION    =',F9.3)
                C  CONVERT FROM DEGREES TO RADIANS
0027              INCR=DINCR*CONVTR
0028              LONCTR=(DLONCT-DLONSS)*CONVTR
0029              LATCTR=DLATCT*CONVTR
0030              DELT=DDELT*CONVTR
0031              BW1=BW1A*CONVTR/2.0
0032              BW2=BW2A*CONVTR/2.0
0033              THETA=THETA1*CONVTR
                C  CHECK FOR BORESIGHT LOCATION IN RANGE OF SATELLITE
0034              AL=DARCOS(DCOS(LONCTR)*DCOS(LATCTR*DELT))
0035              IF(AL.LE.CHK)GO TO 21
0036           20 WRITE(6,400)
0037          400 FORMAT(1H0,'BORESIGHT LOCATION IS NOT IN RANGE OF SATELLITE.'/)
0038              GO TO 1
                C  COMPUTE VECTOR FROM SATELLITE TO BORESIGHT LOCATION
0039           21 RSX=RE*DCOS(LATCTR)*DSIN(LONCTR)
0040              RSY=DIST*DCOS(DELT)-RE*DCOS(LATCTR)*DCOS(LONCTR)
0041              RSZ=DIST*DSIN(DELT)+RE*DSIN(LATCTR)
0042              RSM=DSQRT(RSX**2+RSY**2+RSZ**2)
```

```
0043            GAM=DARSIN(RE*DSIN(AL)/RSM)
0044            EL=((PI/2.0)-(AL+GAM))/CONVTR
0045            WRITE(6,300) EL
0046        300 FORMAT(4X,'ELEVATION',6X,'=',F9.3)
0047            DENOM=DSQRT(RSX**2+RSY**2)
0048            PITCH=DARSIN(RSX/DENOM)
0049            ROLL=DATAN(RSZ/DENOM)
0050            CP=DCOS(PITCH)
0051            CR=DCOS(ROLL)
0052            SP=DSIN(PITCH)
0053            SR=DSIN(ROLL)
0054            NPLT=NPLT+1
0055            IF(NPLT.GT.1)GO TO 15
              C  FIRST PLOT, OPEN PLOTTAPE AND SET ORIGIN
0056            CALL PLOTS(IBUF,1000)
0057            CALL PLOT(1.0,1.0,23)
0058            GO TO 12
              C  NOT FIRST PLOT, SET ORIGIN
0059         15 CALL PLOT(1.0,1.0,-3)
0060         12 DO 31 K=1,L
0061            NDB=NDB+1
0062            LDB=L-K+1
              C  INTERPOLATE FOR RELATIVE BEAMWIDTH
0063            DO 8 J=1,8
0064            IF(DB(LDB)-DBS(J))6,7,8
0065         7  RBW=RBWS(J)
0066            GO TO 9
0067         8  CONTINUE
0068         6  J1=J-1
0069            RBW=(DB(LDB)-DBS(J1))*(RBWS(J)-RBWS(J1))/(DBS(J)-DBS(J1))
                1          +RBWS(J1)
0070         9  A=RSM*DTAN(BW1*RBW)
0071            B=RSM*DTAN(BW2*RBW)
0072            ALPH1=BW1A*RBW
0073            ALPH2=BW2A*RBW
0074            NSTEPS=(360.0/DINCR)+1
0075            BMWDTH=DALPHA*RBW
0076            DO 10 ICT=1,NSTEPS
0077            BETAN=(ICT-1)*INCR
0078            ANG=BETAN+THETA
0079            UM=1.0/DSQRT((DCOS(BETAN)/A)**2+(DSIN(BETAN)/B)**2)
              C  COMPUTE N-TH M VECTOR FROM SATELLITE TO LOCUS ON EARTH
0080            MNPX=RSM*CR*SP+UM*DCOS(ANG)*CP-UM*DSIN(ANG)*SR*SP
0081            MNPY=RSM*CR*CP+UM*DCOS(ANG)*SP-UM*DSIN(ANG)*SR*CP
0082            MNPZ=RSM*SR+UM*DSIN(ANG)*CR
0083            MNX=MNPX
0084            MNY=MNPY*DCOS(DELT)+MNPZ*DSIN(DELT)
0085            MNZ=MNPY*(-DSIN(DELT))+MNPZ*DCOS(DELT)
```

```
0086                BN=DARCOS(MNY/DSQRT(MNX**2+MNY**2+MNZ**2))
0087                IF(BN.GT.BM)GO TO 30
0088                CN=PI-DARSIN(DSIN(BN)*DIST/RE)
0089                DN=PI-(BN+CN)
0090                MNL=DSQRT(RE**2+DIST**2-2.*RE*DIST*DCOS(DN))
0091                DENOM=DSQRT(MNPX**2+MNPY**2)
0092                PITCHN=DARSIN(MNPX/DENOM)
0093                ROLLN=DATAN(MNPZ/DENOM)
                C  COMPUTE N-TH VECTOR FROM CENTER OF EARTH TO LOCUS
0094                REI=MNL*DCOS(ROLLN)*DSIN(PITCHN)
0095                REJ=DIST*DCOS(DELT)-MNL*DCOS(ROLLN)*DCOS(PITCHN)
0096                REK=MNL*DSIN(ROLLN)-DIST*DSIN(DELT)
0097                GO TO 40
                C  IF N-TH M VECTOR DOES NOT INTERSECT EARTH COMPUTE VECTOR
                C   FROM CENTER OF EARTH TO HORIZON SEEN BY SATELLITE
0098             30 TAUN=DARCOS(MNZ/DSQRT(MNX**2+MNZ**2))
0099                IF(MNX.LT.0.0)TAUN=-TAUN
0100                REI=RE*DCOS(BM)*DSIN(TAUN)
0101                REJ=RE*(-DCOS(DELT)*DSIN(BM)-DSIN(DELT)*DCOS(BM)*DCOS(TAUN))
0102                REK=RE*(-DSIN(DELT)*DSIN(BM)+DCOS(DELT)*DCOS(BM)*DCOS(TAUN))
0103             40 DEN=DSQRT(REI**2+REJ**2)
                C  COMPUTE LONGITUDE AND LATITUDE COORDINATES
0104                LAT(ICT)=SNGL(DATAN(REK/DEN)/CONVTR)
0105             10 LON(ICT)=SNGL(DARSIN(REI/DEN)/CONVTR+DLONSS)
0106                WRITE(6,100)DB(LCB),ALPH1,ALPH2
0107            100 FORMAT(1H-,3X,'AT ',F4.1,' DB LEVEL:'/4X,'MAX BMWDTH= ',F5.2/
                   1       4X,'MIN BMWDTH= ',F5.2//
                   2       5X,'LONGITUDE',7X,'LATITUDE'/5X,'(DEGREES)',6X,'(DEGREES)'
                   3      /)
0108                DO 80 I=1,NSTEPS
0109             80 WRITE(6,200) LON(I),LAT(I)
0110            200 FORMAT(1H ,4X,F9.3,6X,F9.3)
0111                IF(NDB.GT.1)GO TO 93
                C  IF FIRST DB LEVEL PLOT AXES AND TITLES
0112                CALL SCALE(LON,9.0,NSTEPS,1)
0113                CALL SCALE(LAT,9.0,NSTEPS,1)
0114                NP1=NSTEPS+1
0115                NP2=NSTEPS+2
0116                IF(LON(NP2)-LAT(NP2))90,91,92
0117             90 LON(NP2)=LAT(NP2)
0118                GO TO 91
0119             92 LAT(NP2)=LON(NP2)
0120             91 CALL AXIS(0.0,0.0,'LONGITUDE (DEGREES)',-19, 9.0,0.0,LON(NP1),
                   1          LON(NP2))
0121                CALL AXIS(0.0,0.0,'LATITUDE (DEGREES)',18, 9.0,90.0,LAT(NP1),
                   2          LAT(NP2))
0122                SCFCT=LON(NP2)
0123                FVLN=LON(NP1)
```

```
0124                FVLT=LAT(NP1)
0125                XCT=(SNGL(DLONCT)-LON(NP1))/LON(NP2)
0126                YCT=(SNGL(DLATCT)-LAT(NP1))/LAT(NP2)
0127                CALL SYMBOL(XCT,YCT,0.21,3,0.0,-1)
0128                CALL SYMBOL(1.0,8.0,0.21,'DATA SET NO. ',0.0,13)
0129                N1=FLOAT(N)
0130                CALL NUMBER(999.0,999.0,0.21,N1,0.0,-1)
0131             93 LON(NP2)=SCFCT
0132                LAT(NP2)=SCFCT
0133                LON(NP1)=FVLN
0134                LAT(NP1)=FVLT
                 C  PLOT COORDINATES OF LOCUS
0135                CALL LINE(LON,LAT,NSTEPS,1,0,0)
0136             31 CONTINUE
0137                CALL PLOT(14.0,-1.0,23)
0138                GO TO 1
0139           1000 IF(NPLT.LE.0) GO TO 1001
                 C  CLOSE PLOTTAPE
0140                CALL PLOT(0.0,0.0,999)
0141           1001 WRITE(6,700) NPLT
0142            700 FORMAT('1NUMBER OF PLOTS PRODUCED =',I3)
0143                STOP
0144                END
```